



ENGLISH

**HYBRID**  
ELECTRIFIED



**REMAX**  
**450X**



# MAXimise your results!

Mobile mineral processing technology made by SBM – advantages right down the line

SBM is pursuing a simple goal with its track-mobile processing plants: We offer the technically and economically leading solution in every power class.

Efficient full-hybrid drives, best-in-class crushing performance, productive screening and conveying equipment – all packaged in highly mobile plant technology with exemplary ease of operation.

## DRIVE WITH A FUTURE

Constantly rising fuel costs, stricter environmental regulations, high burdens due to maintenance and repair:

**It has never made more sense to change to intelligent hybrid technology in mobile processing!**

## CRUSHING TECHNOLOGY

SBM crushers combine maximum feed size and high throughput with precisely defined product quality: **Benefit from our decades of experience in all areas of crushing technology.**

## PERFORMANCE WITHOUT COMPROMISE




Optimum transfer, high throughput of the standard active pre-screening and optional secondary screening unit and large stockpile volumes of the product conveyor belts ensure **full productivity and added value in operation.**

## MORE MAN MORE MACHINE

Our constantly further developed control system **CRUSH CONTROL** actively supports your staff in all work steps and **optimises your processes in operation and maintenance.**

# Hybrid Pioneers - since 1980

Benefit from the most sophisticated drive system in the market!

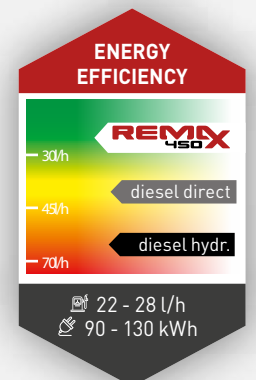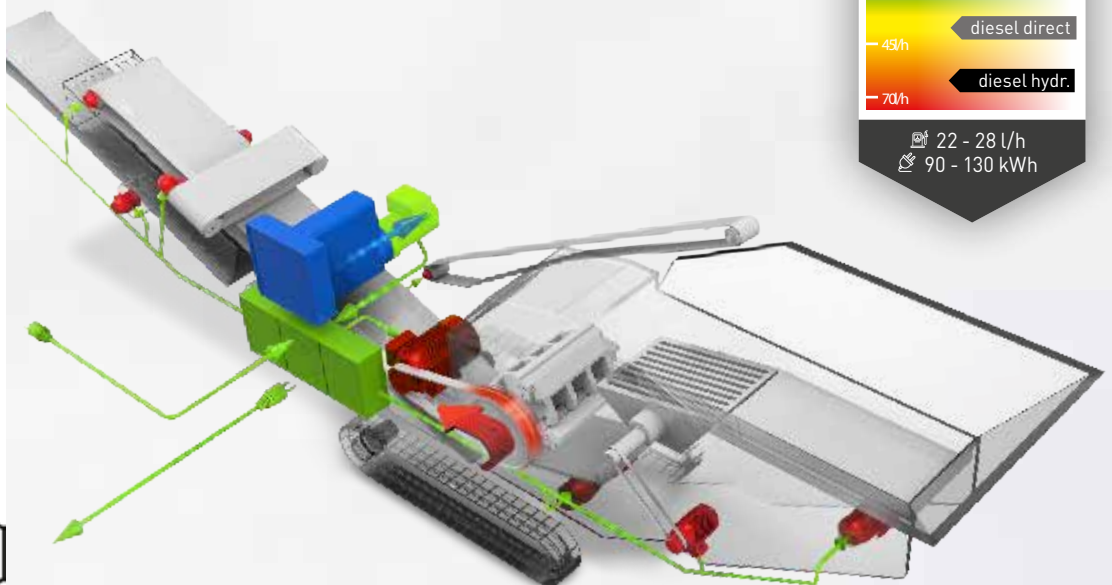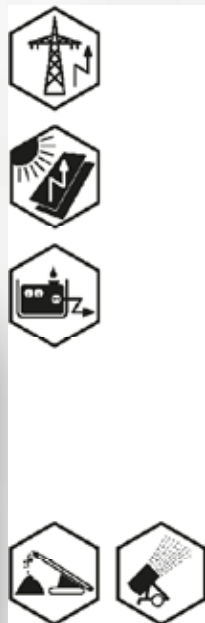

## DRIVE SYSTEM REMAX 450

Motor	CUMMINS L9*
Operating speed	4-stage
Tank capacity Diesel/AdBlue	550 l / 38 l
Generator	300 kVA
Electric motor crusher	160 kW (up to 240 kW peak)
Plug-in grid connection (opt.)	400 V, 300 kVA; 50 - 60 hz
Plug-out power supply	400 V, 63A

\* comply with the current emission regulations

Only SBM consistently relies on the advantages of the **purely electrical drive of conveying, crushing and screening components** in mobile crushing plants of all power classes.

In **independent diesel operation**, a motor/generator unit supplies the energy at low, constant speeds: **low-emission, quiet and extremely economical.**

All electric drives with their cable and plug-in connections are **practically maintenance-free**, do not cause any thermal or stand-by losses and decisively reduce environmental risks due to large hydraulic oil volumes.

In **optional mains operation**, you simply flip a switch, and everything about the plant works as usual - **only without diesel.**

# REMAX 450: One for everything

The power all-rounder in the 50-ton class

## HARD FACTS

Inlet opening	1,270 x 800 (1,000*) mm
Feed size (max. diagonal space)	0 - 800 mm (up to 600 kg per single piece)**
Feed capacity	max. 450 t/h***
Final grain size	0 - 22 to 0 - 90 mm

\* Inlet cover open

\*\* Iron reinforcement thickness max. 30 mm and protruding from the concrete block max. 200 mm


\*\*\* Depending on feed material, feed size and desired final grain size

Large feed volume – highly efficient pre-screen  
– RCI-impact crusher – high-capacity secondary screen:

**With REMAX 450, SBM is setting new standards in flexible and profitable mobile crushing.**

Whether as a primary crusher in recycling with reinforced concrete rubble, construction debris and asphalt or as a compact, versatile secondary crusher in a wide variety of raw materials:



**We deliver high output, high product quality and low operating costs in a package.**



**USE**  
natural sandstone, sand & gravel

**LIMESTONE**  
0/800 to 0/90



**Product performance:** 450 t/h  
**Diesel consumption:** 32 l/h  
**Impact bars:**  
2 high / 2 low, hard & tough

**USE**  
natural sandstone, sand & gravel

**RIVER GRAVEL**  
0/400 to 0/32



**Product performance:** 210 t/h  
**Diesel consumption:** 25 l/h  
**Impact bars:**  
4 high, hard-chrome plated ceramic

**USE**  
construction debris & recycling

**CONCRETE & BRICK**  
0/600 to 0/45


**Product performance:** 220 t/h  
**Diesel consumption:** 22 l/h  
**Impact bars:**  
2 high / 2 low, hard & tough ceramic

**USE**  
construction debris & recycling

**ASPHALT SLABS**  
to 0/22

**Product performance:** 200 t/h  
**Diesel consumption:** 28 l/h  
**Impact bars:**  
4 high/ 2 deep, hard-chrome plated ceramic




## Slim on the road - quick and agile on site

Simple transport - minimum set-up times

**We bring high performance to your construction site - fast, safe and easy.**

The high ground clearance makes transport easy, and even when fully equipped all the equipment remains on the plant. Within just a few minutes, a machine operator makes the plant ready for operation - without tools, supported by the plant control system and safely from the ground.

Perfectly balanced, REMAX 450 with its robust two-stage chain drive can reach even remote and elevated work sites independently! Even in difficult terrain it can be set up and repositioned quickly, it always keeps loading routes and loading times short and optimises your construction site logistics.

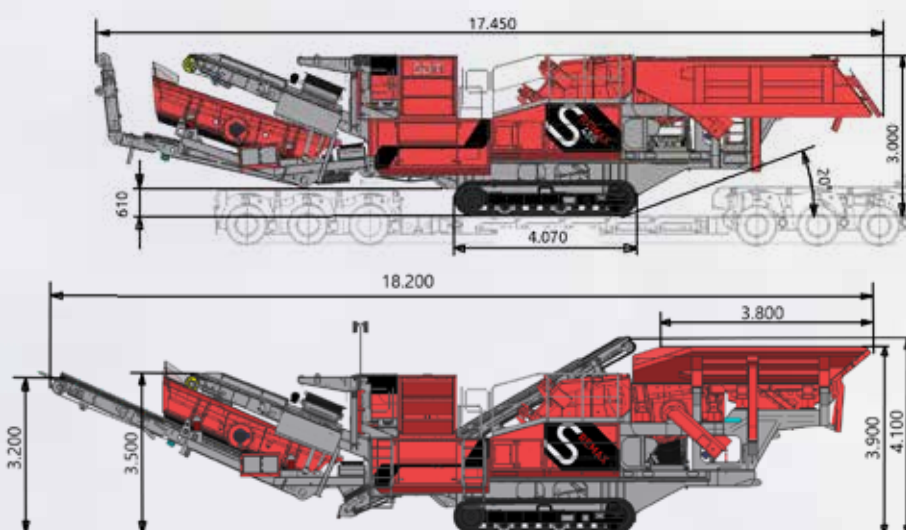

TRANSPORT DIMENSIONS	LENGTH	WIDTH	HEIGHT	WEIGHT*
without secondary screening unit	14,500 mm	3,000 mm	3,600 mm	47.000 kg
with secondary screening unit 1-deck	17,450 mm	3,000 mm	3,600 mm	52.500 kg
with secondary screening unit 2-deck	17,450 mm	3,000 mm	3,600 mm	54.300 kg

\*total weight including all options





## 8,0 m<sup>3</sup> FEED HOPPER

- highly wear-resistant steel construction
- three-sided, folding walls

## FREQUENCY-CONTROLLED FEEDING CHUTE

- width: 1,200 mm
- wear lining made of highly wear-resistant steel
- automatic control of the feeding speed according to crusher load



## ACTIVE PRE-SCREENING

- 2-deck circular vibratory screen
- width: 1,200 mm x length: 2,200 mm
- separate/complete discharge/bypass of the screen fractions via manual 3-way-flap

## PRE-SCREENING CONVEYOR

- discharge height: 2,900 mm
- stockpile capacity up to 90 t
- hydraulic folding for transport

## DRIVE FRAME AND TRACK RUNNING GEAR

- reinforced and weight-optimised frame structure
- track running gear integrated in the frame
- proportional drive
- speed: max. 0.80 km/h
- climbing ability: 27 %

## CRUSHER DISCHARGE CHUTE

- width: 1,350 mm
- wear lining made of highly wear-resistant steel
- frequency-converter-controlled drive with cleaning function

## MAGNETIC SEPARATOR

- permanent or electromagnet (optional)
- height-adjustable via radio remote control

## CRUSHER DISCHARGE CONVEYOR

- quality: Rip-Stop
- discharge height: 3,550 mm
- stockpile capacity up to 160 t
- hydraulic folding for transport

## 1-/2-DECK (OPTION) SECONDARY SCREENING UNIT

- 1- or 2-deck circular vibratory screen with twin drive
- 1-/2-deck: 1,400 x 3,750 mm
- fines conveyor
- discharge height: 3,500 mm
- stockpile volume up to 150 t
- easy to dismount

## HYBRID ELECTRIFIED

## OVERSIZE MATERIAL RETURN CONVEYOR

- infinitely adjustable belt speed
- hydraulic swiveling to stockpile
- discharge height: 4,400 mm
- stockpile capacity up to 180 t
- hydraulic folding for transport



# REMIx 450X



## OPTIONS

- wind sifter with frequency converter
- plant mains operation (plug-in)
- single-roll belt weighers
- water spraying at conveyor discharge
- plant lighting
- refuelling pump for diesel generator set

# Versatile, powerful and safe

All our knowledge for your tasks

The RCI-impact crusher incorporates our decades of experience in crushing technology. The large-dimensioned feed opening, a high crushing ratio and large power reserves of the electric drive make it the ideal plant for recycling applications.


In all applications, it convinces with its high, precisely adjustable product quality. The excellent accessibility of the crusher chamber with multiple-protection and the optimised design of all wear parts guarantee high availability in long continuous operation.

## HOUSING

- housing made of high tensile steel
- optimised inlet geometry for maximum penetration into the impact range
- hydraulic opening of the inlet flap and the housing
- simple change of wear parts, interchangeable to ensure optimum utilisation and reduced stock-keeping

## IMPACT TOOLS

- 2 independent crushing stages
- simple & easy gap adjustment
- power transmission system of the impact tools
- high foreign matter compatibility due to optimised by-passes
- massive mono-block system - revolvable for maximum utilisation

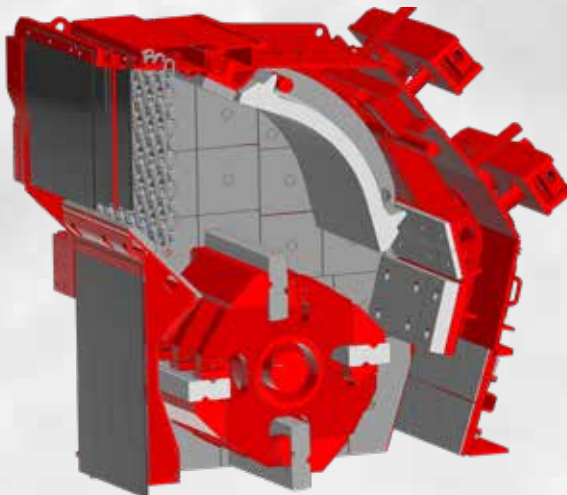

## DRIVE

- electric motor 160 kW (peak load up to 240 kW)
- 4 rotation speeds/ rotor circumferential speed: 33-39 m/s
- belt drive with tensioner

## ROTOR WITH IMPACT BARS

- welded and annealed steel structure
- RCI 12/13-crusher
- 4 impact bars
- simple change of impact bars sideways or upwards
- impact bars revolvable for maximum utilisation


## SAFETY

- rotor re-turning device, lockable in all positions
- safe changing of impact bars
- easy removal of blockages
- key system with monitored stand-still of the rotor

# Always the right tools

Original impact bars made by SBM get the best from your crusher

Only impact bars in OEM quality ensure the full performance of your SBM crusher and prevent uncontrollable wear. Precisely matched to the crushing characteristics of our technology, our originals simply deliver more, longer, and more economically.

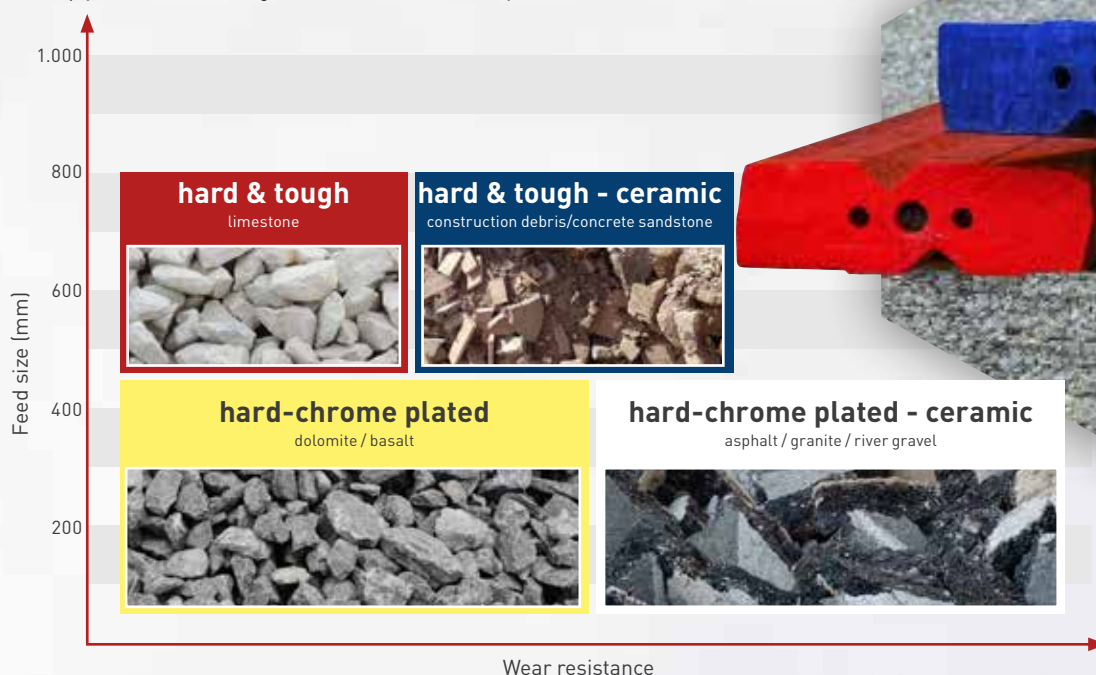

This illustration helps you to choose the optimum impact bars for normal crushing operations. For special applications, please contact your SBM partner.



# Everything under „CRUSH CONTROL“

Up-to-date support in operation and maintenance

Intuitive operability, fast reactions if necessary and significantly reduced workload of machine operators, technicians or dispatchers are the advantages of our control system CRUSH CONTROL with mobile radio-based app solution.

## INTUITIVE & SAFE

- simple plant start/stop via classic push buttons
- operator guidance and status display via 10-inch colour display
- quick adjustment of performance parameters via touch screen

## OPTIMISED PRODUCTIVITY

- continuous monitoring of all plant functions
- load-dependent crusher feeding via frequency-controlled feed chute
- comfortable and safe one-man operation of the complete plant via multifunctional remote control from excavator/loader

## ALWAYS INFORMED

- current location and machine data via **personalised app solution**
- accessible at any time and from everywhere via the internet
- individually configurable information on operating data, production output (opt.) and maintenance status of your plant

## QUICK SUPPORT

- authorised remote access to machine functions by SBM technicians or SBM customer service
- fast troubleshooting or process optimisation without on-site intervention

## THE COMFORT PLUS IN SERIES

- 10 integrated functions
- complete plant operation
- proportional drive control
- radio link monitoring with emergency shutdown



Find here  
the access to  
our app.

# The professionals at your side

Comprehensive dealer support for all industries

We are continuously expanding our international dealer network with strong and experienced sales and service partners.

Together with our product specialists, they will find the right solution for you and accompany you throughout the whole life of the plant.

Find your  
SBM partner in your region here



## CUSTOMER SERVICE AND SALES

The trained customer consultants of our trade partners will support you in selecting the track-mobile crushing plants best-suited for YOU with the corresponding equipment. They will provide you with information and forecasts on production output as well as investment costs, making your investment transparent and secure in the medium- and long-term range.



## PARTS LOGISTICS

SBM partners provide professional back-up in the quick supply of spare and wear parts, thus ensuring full availability of your key machines.



The **WEB shop** simplifies  
your orders.

## QUALIFICATION

From machine handover to regular training for your employees - our partners offer a wide range of services for every industry.

## MAINTENANCE & SERVICE

Whether it is scheduled regular maintenance, a large all-round service or rapid intervention on the construction site - our partners are ready to help: competent, well-prepared and dependable.

# Our whole experience for you

## SBM Mineral Processing

For more than 70 years we at SBM Mineral Processing have been developing and building machines and plants for the stone and earth industry. In addition to stationary plants, we delivered mobile plants to process aggregates for the concrete technology already at an early stage. Today, we are one of the leading manufacturers of track-mounted processing plants with **SBM MOBILE CRUSHING & SCREENING SOLUTIONS**.

We are true pioneers in the development of diesel-electric drive systems for all power classes, which we have been building for over 60 years. All our plants are „hybrid electrified“ today - thanks to extensive standardisation, they convince in natural stone and recycling operations with their outstanding production performance at low operating costs, maximum availability, and simple and safe operation.

With a qualified, cross-industry dealer and service network in all leading markets of the world, we ensure the sustainable and economic success of our customers.

1950	Foundation of SBM	1980	First mobile track-mounted crushing plant HYBRID ELECTRIFIED	2016	New product line "SBM Mobile"
1960	First mobile crushing plant on wheels HYBRID ELECTRIFIED	2014	Consolidation MFL and SBM Mineral Processing		



**SBM Mineral Processing GmbH**  
Oberweis 401, 4664 Oberweis, Austria  
Phone: +43 3612/2703-0 · office@sbm-mp.at  
[www.sbm-mp.at](http://www.sbm-mp.at)

